

Total Tanker Air Force Features:

SPECIFICATIONS

EMULSION TANK:

- **Size** - 1000 U.S. Gallon; 12-inch filler cap for added safety and convenience
- **Working Pressure** - 100 psi @ 300° F pressure relief set to 100 psi
- **Insulation** - R-15- rating with a fire retardant fiber reinforced aluminum cover
- **Heat** - Two 1000w radiant heater blankets (220v) with thermostatic control and 15 foot of electrical cord
- **Outer Skin** - 0404 aluminum

EMULSION CLEAN OUT:

- 10 U.S. Gallon 8-inch sch 40

EMULSION DISPENSING HOSE:

- **Hose** - 17 foot long 1-inch i.d. steel reinforced rubber
- **Nozzle** - Lite weight with on/off valve

DISPENSING FLOW @ PRESSURE:

- 18 gpm @ 8 psi
- 22 gpm @ 10 psi
- 36 gpm @ 50 psi
- 48 gpm @ 90 psi

TRAILER:


- **Frame** - 6" x 2 " x 1/4" Thick rectangular tube frame
- **Axles** - Tandem 6,000 lb torsion for a 12,000 lb load capacity
- **Tires** - Four ST235-80- R16; load range E; heavy-duty white modular 8 lug rims
- **Brakes** - Four wheel electric with breakaway unit
- **Lights** - Brake, tail & side marker
- **Dimensions** - 96" wide x 92" high x 220" long
- **Weight** - 4'500 lb empty 12,000 loaded



■ **Electrical Heating System**



■ **Emulsion Line Clean out**

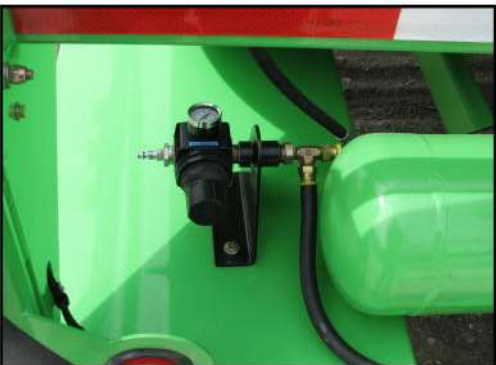

■ **Adjustable Pressure Regulator**



■ **Emulsion Level Gauge**



Emulsion Transport System



Equipment Marketing Co.

P.O. Box 697

Cloverdale, IN 46120

Office: (765) 795-2277 | Cliff's Cell: (765) 307-0888 | Brian's Cell: (812) 870-1673

Email: TotalPatcher@gmail.com

Total Tanker Air Force No Pumps !

Transporting asphalt emulsion is now a breeze with the **Total Tanker** Air Force. The **Total Tanker** uses compressed air to force the liquid asphalt emulsion out of the tank. **No Pumps** to clean or maintenance. Just hook up to your patchers compressed air system and start filling.

With **The Total Tankers** onboard clean out system you can easily flush the emulsion valve and hose in a few seconds using only a couple quarts of diesel.


The **Total Tanker** Is a 1000 gallon AMSE certified Pressure vessel. That is heated with two 1000 watt 220/208 volt thermostatic controlled heating blankets.



■ **Fill Patching Equipment With Ease**



■ **Easy Fill Nozzle**

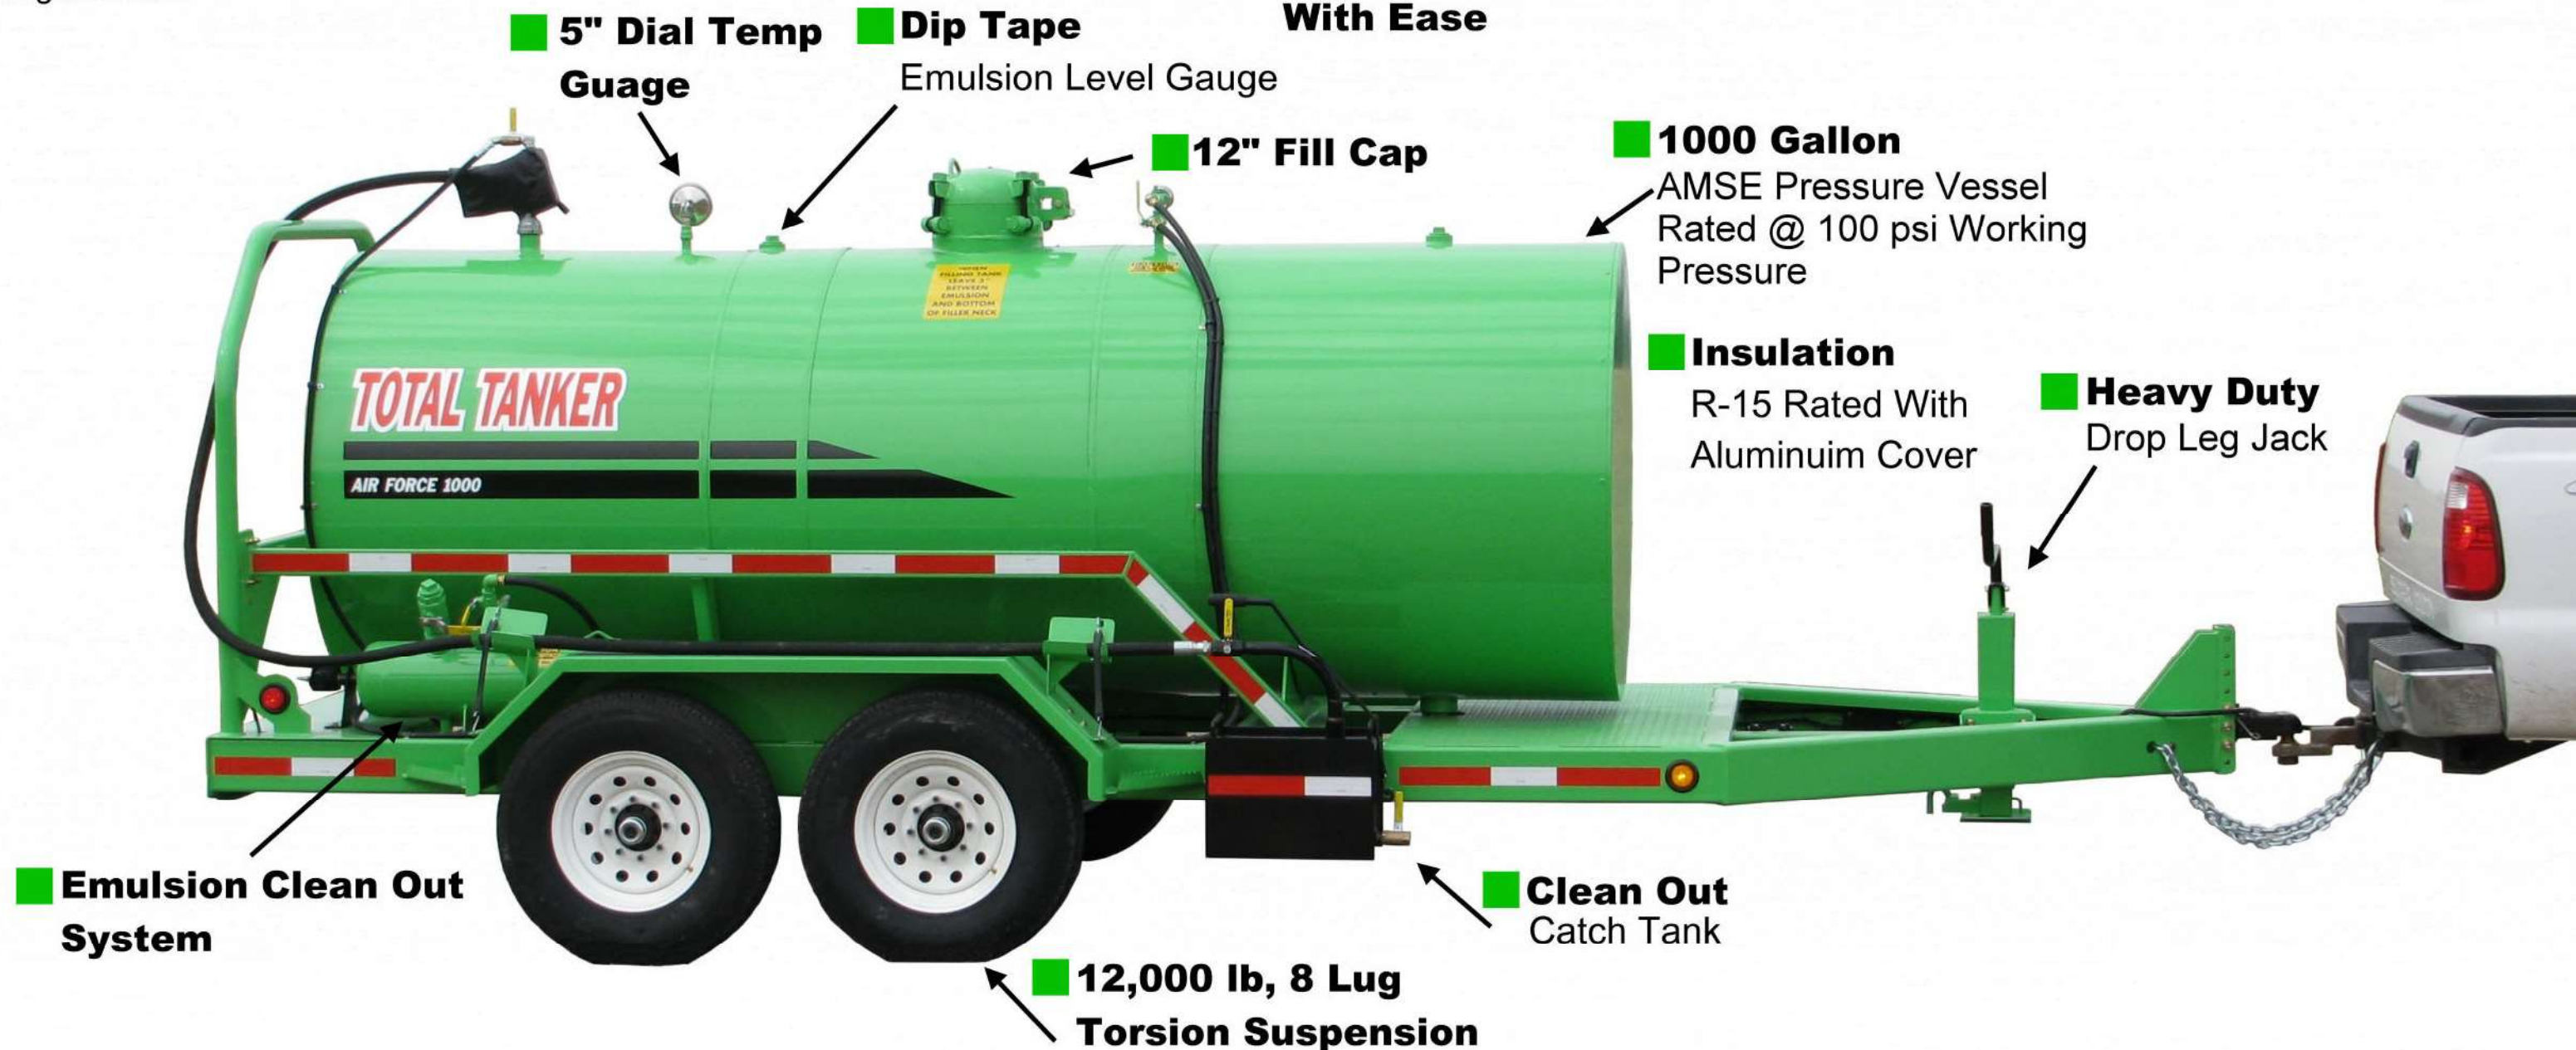

■ **5" Dial Temp Guage**

■ **Dip Tape Emulsion Level Gauge**

■ **12" Fill Cap**

■ **1000 Gallon AMSE Pressure Vessel Rated @ 100 psi Working Pressure**

■ **Insulation R-15 Rated With Aluminuim Cover**

■ **Heavy Duty Drop Leg Jack**

■ **Emulsion Clean Out System**

■ **Clean Out Catch Tank**

■ **12,000 lb, 8 Lug Torsion Suspension**